


Crystal Unit SMD Type CM4025 RoHS Conform

Unit: mm

External Dimensions

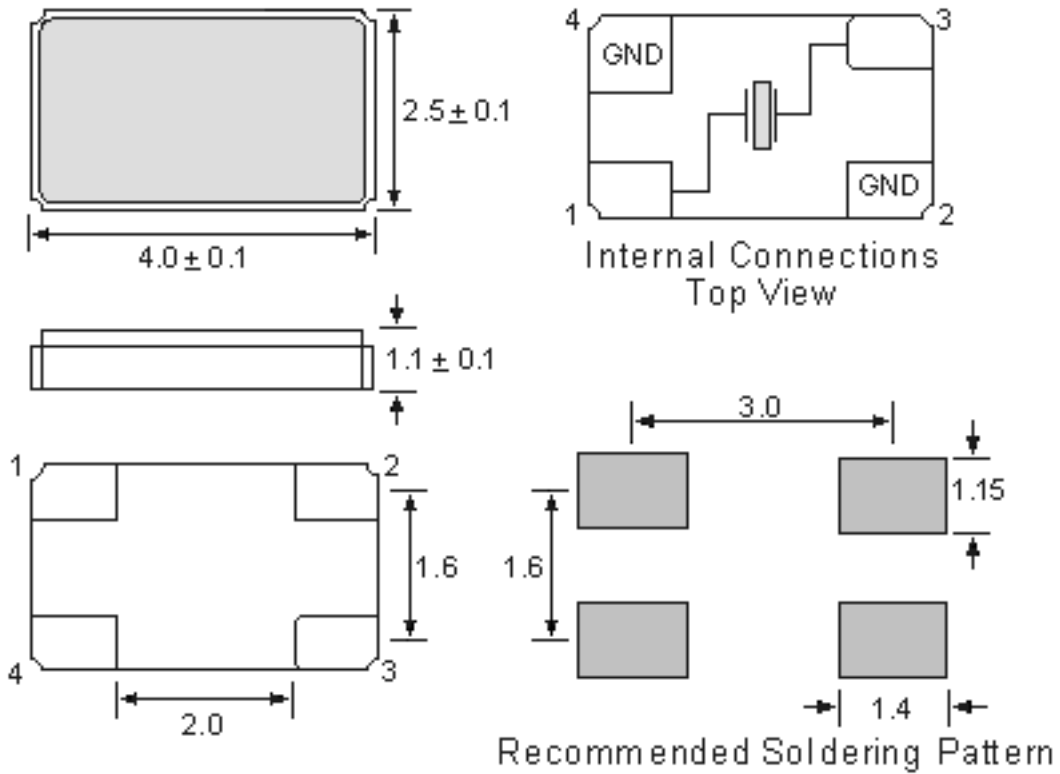

Specifications

Holder Type	CM4025
Frequency Range	12 to 27 MHz (fund.)
Frequency Stability at 25° C	± 10 to ± 50 ppm
Temperature Stability	± 10 ppm @ -10°C to ~+60°C ± 30~ ± 50 ppm @ -40°C to ~+85°C
Drive Level	0.1 mW max.
Load Capacitance (C _L)	12 pF~32pF, series (00)
Shunt Capacitance (C _O)	< 5pF
Vibration Mode	AT-cut, fund.
Equivalent Series Resistance	R = 60 Ohm max. (fund.)
Aging	< ± 5 ppm max./ year
